



■ Features :


- *Universal AC input / Full range
- *Built-in active PFC function, PF>0.95
- *Protections: Short circuit / Overload / Over voltage / Over temperature
- *Forced air cooling by built-in DC Fan (Note5)
- "1U low profile 40.5mm
- *High efficiency up to 90.5%
- *Built-in remote ON-OFF control
- *Built-in remote sense function
- *LED indicator for power on
- *3 years warranty

SPECIFICATION



| MODEL | | RSP-500-3.3 | RSP-500-4 | RSP-500-5 | RSP-500-12 | RSP-500-15 | RSP-500-24 | RSP-500-27 | RSP-500-48 | | | |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------|-----------------|--------------------|------------------|---------------------|-------------|--|--|--|
| | DC VOLTAGE | 3.3V | 4V | 5V | 12V | 15V | 24V | 27V | 48V | | | |
| ОИТРИТ | RATED CURRENT | 90A | 90A | 90A | 41.7A | 33.4A | 21A | 18.6A | 10.5A | | | |
| | CURRENT RANGE | 0 ~ 90A | 0 ~ 90A | 0 ~ 90A | 0 ~ 41.7A | 0 ~ 33.4A | 0 ~ 21A | 0 ~ 18.6A | 0 ~ 10.5A | | | |
| | RATED POWER | 297W | 360W | 450W | 500.4W | 501W | 504W | 502.2W | 504W | | | |
| | RIPPLE & NOISE (max.) Note.2 | 120mVp-p | 120mVp-p | 150mVp-p | 150mVp-p | 150mVp-p | 150mVp-p | 150mVp-p | 150mVp-p | | | |
| | VOLTAGE ADJ. RANGE | 2.8 ~ 3.6V | 3.6 ~ 4.3V | 4.5 ~ 5.5V | 10 ~ 13.2V | 13.5 ~ 18V | 20 ~ 26,4V | 26 ~ 30V | 41 ~ 56V | | | |
| | VOLTAGE TOLERANCE Note,3 | ±2.0% | ±2.0% | ±2.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | | | |
| | LINE REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.3% | ±0.3% | ±0.2% | ±0.2% | ±0.2% | | | |
| | LOAD REGULATION | ±1.0% | ±1.0% | ±1.0% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | | | |
| | SETUP, RISE TIME | | | | | | 20.070 | 20.070 | 201070 | | | |
| | HOLD UP TIME (Typ.) | 1500ms, 80ms/230VAC 3000ms, 80ms/115VAC at full load | | | | | | | | | | |
| INPUT | , ,, | 18ms/230VAC 14ms/115VAC at full load | | | | | | | | | | |
| | VOLTAGE RANGE Note.4 | 85 ~ 264VAC 120 ~ 370VDC | | | | | | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | | | | | | |
| | POWER FACTOR (Typ.) | PF>0.95/230VA | | 8/115VAC at ful | | 000/ | 000/ | 00.50/ | T 00 =0/ | | | |
| | EFFICIENCY (Typ.) | 81% | 83% | 84% | 88% | 88% | 89% | 89.5% | 90.5% | | | |
| | AC CURRENT (Typ.) | 4.2A/115VAC 2.1 A/230VAC 5.3A/115VAC 2.65 A/230VAC | | | | | | | | | | |
| | INRUSH CURRENT (Typ.) | 20A/115VAC 40A/230VAC | | | | | | | | | | |
| | LEAKAGE CURRENT | <2mA/240VAC | | | | | | | | | | |
| | OVERLOAD | 105 ~ 130% rated output power | | | | | | | | | | |
| | | Protection type | : Constant curr | ent limiting, rec | overs automatic | ally after fault c | ondition is remo | oved | | | | |
| | OVER VOLTAGE | 3.8 ~ 4.5V | 4.5 ~ 5.3V | 5.75 ~ 6.75V | 13.8 ~ 16.2V | 18.8 ~ 21.8V | 27.6 ~ 32.4V | 32.9 ~ 38.3V | 58.4 ~ 68V | | | |
| PROTECTION | | Protection type: Shut down o/p voltage, re-power on to recover | | | | | | | | | | |
| | OVER TEMPERATURE | Shut down o/p | voltage, recove | rs automatically | after temperati | ure goes down | | | | | | |
| | REMOTE CONTROL | POWER ON:open or 0~0.8VDC between RC+(Pin 4)&RC-(Pin3) on CN100 POWER OFF: 4~10VDC between RC+(Pin 4)&RC-(Pin3) on CN100 | | | | | | | | | | |
| FUNCTION | REMOTE SENSE | Compensate voltage drop on the load wiring up to 0.3V | | | | | | | | | | |
| | FAN CONTROL (Typ.) | RTH2≧50°C±10°C Fan on; RTH2≦40°C±10°C Fan off (Fan always on for 3.3~5V,Fan ON/OFF control for 12~48V) | | | | | | | | | | |
| ENVIRONMENT | WORKING TEMP. | -30 ~ +70°C (Refer to "Derating Curve") | | | | | | | | | | |
| | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | | | | | | | | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +85°C, 10 ~ 95% RH | | | | | | | | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0~50°C) | | | | | | | | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes | | | | | | | | | | |
| | SAFETY STANDARDS | UL60950-1, TUV EN60950-1, EAC TP TC 004, CCC GB4943.1(24V only) approved | | | | | | | | | | |
| | WITHSTAND VOLTAGE | | | | | r(z+v omy) app | 10764 | | | | | |
| SAFETY & | ISOLATION RESISTANCE | | | | | | | | | | | |
| EMC (Note 4) | EMC EMISSION | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH Compliance to EN55032 (CISPR32) Class B, EN61000-3-2,-3, EAC TP TC 020,GB/T 9254(24V only) | | | | | | | | | | |
| | | • | | | - | | | • , | EAC TO TO | | | |
| | EMC IMMUNITY | 40==141 | | | 5024, EN01000 | -6-2, EN61204- | o neavy moustry | y ievei, criteria A | , EAU IP IU | | | |
| | MTBF | 187./K hrs min. | | 17F (25°C) | | | | | | | | |
| OTHERS | DIMENSION | 230*127*40.5m | | | | | | | | | | |
| | PACKING | 1.3Kg; 9pcs/12. | /Kg/0./CUFT | | | | | | | | | |
| NOTE | Ripple & noise are measure Tolerance: includes set up Derating may be needed ur Fan always on for 3.3~5V,F The power supply is consided EMC directives. For guidance (as available on http://www.r | ally mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. red at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. tolerance, line regulation and load regulation. Indeed low input voltages. Please check the derating curve for more details. Fan ON/OFF control for 12~48V. Idered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets ce on how to perform these EMC tests, please refer to "EMI testing of component power supplies." Imeanwell.com) Iderating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500) | | | | | | | | | | |
| | | | 1000m with fanl | less models and | d of 5°C/1000m | with fan models | for operating al | Ititude higher tha | | | | |



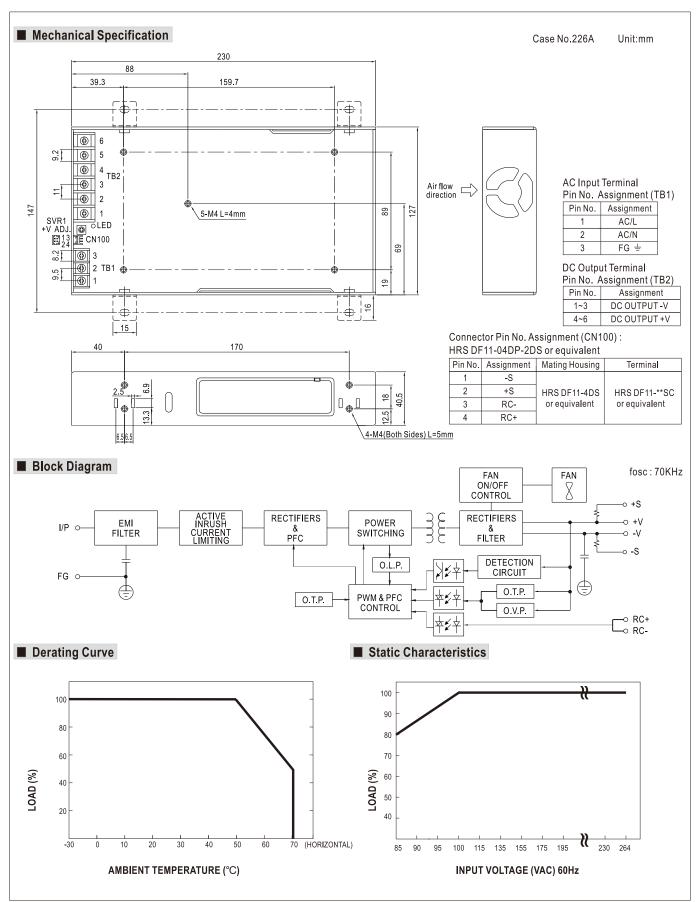



■ Function Description of CN100


| Pin No. | Function | Description |
|---------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | | Negative sensing. The -S signal should be connected to the negative terminal of the load. The -S and +S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.3V. |
| 2 | | Positive sensing. The +S signal should be connected to the positive terminal of the load. The +S and -S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.3V. |
| 3 | RC- | Return for RC+ signal input. |
| 4 | RC+ | Turns the output on and off by electrical or dry contact between pin 4 (RC+) and pin 3 (RC-), 0~0.8VDC or open; Power ON, 4~10VDC; Power OFF. |


■ Function Manual

1.Remote Control

The PSU can be turned ON/OFF by using the "Remote Control" function.

| Between RC-(pin3) and RC+(pin4) on CN100 | PSU Status | | |
|------------------------------------------|------------|--|--|
| SW OFF (0 ~ 0.8VDC) or open | ON | | |
| SW ON (4 ~ 10V) | OFF | | |





2.Remote Sense

The remote sensing compensates voltage drop on the load wiring up to $0.3\,\mbox{V}$

