
## Standard Product Reference Sheet

## VCDB1104P-4B83B-TR



### **Features**


Package	1608(t=1.15 mm) Type, lens color: water clear, Blue color emitting LED Outer Dimension $1.64 \times 0.84 \times 1.15$ mm ( L x W x H )
Product features	<ul> <li>Comply with JEDEC MSL-3 (IPC/JEDEC J-STD-020D)</li> <li>Soldering pad for current 1608 size (1111C type) available</li> <li>Narrow spatial distribution</li> <li>suitable for light distribution on limited irradiation area</li> <li>Lead-free soldering compatible</li> <li>RoHS compliant</li> </ul>

## **Recommended Applications**

•Communication Machine, Electric Household Appliances, OA/FA, Light source for indicator,etc.



Unit :mm
Weight :1.7 mg
Tolerance : $\pm$ 0.1

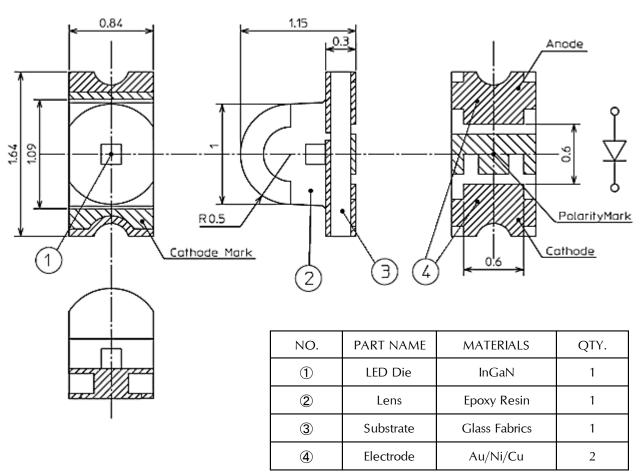

## Recommended Pad

(0.6)

Unit :mm

## **Specifications**

### VCDB1104P-4B83B-TR

### [ Product Overview ]

DIE MATERIAL	InGaN
EMITTING COLOR	Blue
RESIN COLOR( EMITTING AREA)	Water clear

## 【 Absolute Maximum Ratings 】

(Ta=25°C)

			(1a-25 C)	_
ПЕМ	SYMBOL	maximum ratings	UNITS	
Power Dissipation	$P_{d}$	27	mW	1
Forward Current	I <sub>F</sub>	8	mA	1
Repetitive Peak Forward Current "1ms,1/20duty"	I <sub>FRM</sub>	24	mA	
I <sub>F</sub> Derate Linearly from "85° <b>C</b> "	$\Delta$ If	0.50	mA/°C	
I <sub>FRM</sub> Derate Linearly from "85° <b>C</b> "	$\Delta$ Ifrm	1.20	mA/°C	
Reverse Voltage	V <sub>R</sub>	5	V	
Operating Temperature	$T_{opr}$	-40 <b>~</b> +100	°C	
Storage Temperature	$T_{stg}$	-40 <b>~</b> +105	°C	
Electrostatic Discharge Threshold "HBM"	ESD	1,000	V	Note1
Soldering Temperature "Reflow Soldering"	$T_{sld}$	260	°C	Note2

Note 1 ESD testing method : EIAJ4701/300(304) Human Body Model(HBM)  $1.5k\Omega$ , 100pF

Note 2 Please refer to Page 8, Soldering Conditions.

## **[** Thermal Characteristics **]**

(Ta=25°C)

				(: 4 = 5 - 7	-
ІТЕМ	SYMBOL	TYP.	MAX.	UNITS	
Thermal Resistance 【Junction - Ambient】	R <sub>th(j-a)</sub>	600	-	°C/W	Note3
Thermal Resistance  [Junction - Solder point]	$R_{th(j-s)}$	400	-	°C/W	
Junction Temperature	Tj	-	100	°C	

Note3. Rth(j-a)Measuring condition

•PCB:FR-4(t=1.6mm)

•Pattern Size: 16mm<sup>2</sup>



#### **[** Electro and Optical Characteristics ]

(Ta=25°C)

						(Ta=25 C)
ПЕМ	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Forward Voltage	$V_{F}$	I <sub>F</sub> = 5mA	2.6	3.0	3.3	V
Reverse Current	I <sub>R</sub>	$V_R = 5V$	-	-	10	μA
Luminous Intensity	l <sub>V</sub>	I <sub>F</sub> = 5mA	39	56	82	mcd
Luminous Flux	Ф۷	I <sub>F</sub> = 5mA	-	90	-	mlm
Peak Wavelength	λр	I <sub>F</sub> = 5mA	-	463	-	nm
Dominant Wavelength	λd	I <sub>F</sub> = 5mA	464	470	476	nm
Spectral Line Half Width	Δλ	I <sub>F</sub> = 5mA	-	22	-	nm
Half Intensity Angle	2θ 1/2	I <sub>F</sub> = 5mA	-	45	-	deg.

#### Notes

Above Luminous Intensity (I<sub>V</sub>) values and Dominant wavelength ( $\lambda$  d) values are the setup value of the selection machine. [Tolerance: IV···±10%,  $\lambda$  d···±1nm]

#### 【 Sorting For Luminous Intensity and Dominant Wavelength 】

LEDs shall be sorted out into the following ranks of Luminous Intensity and Dominant Wavelength.

Luminous Intensity (I<sub>v</sub>) Rank


Dominant Wavelength (λ d) Rank


Rank	l <sub>v</sub> (mcd)		Conditions
Kalik	MIN.	MAX.	Conditions
В8	39	47	
В9	47	56	$I_F = 5mA$
ВХ	56	68	Ta=25℃
BY	68	82	

Rank	λ d (nm)		Conditions
Kank	MIN.	MAX.	Conditions
В	464	468	
С	468	472	I <sub>F</sub> =5mA Ta=25 <b>°C</b>
D	472	476	1a-23 <b>C</b>


#### Notes


Above Luminous Intensity (IV) values and Dominant wavelength ( $\lambda$  d) values are the setup value of the selection machine. [Tolerance: IV... $\pm$ 10%,  $\lambda$  d... $\pm$ 1nm]

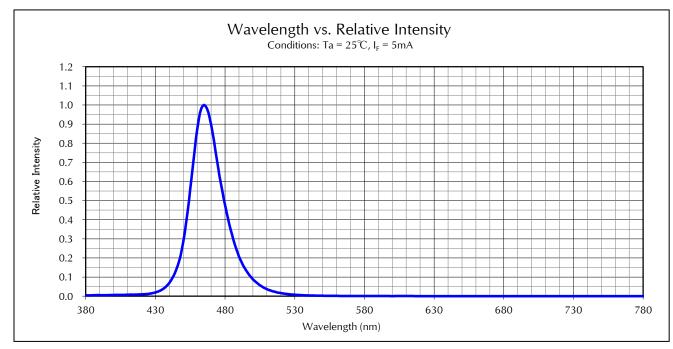


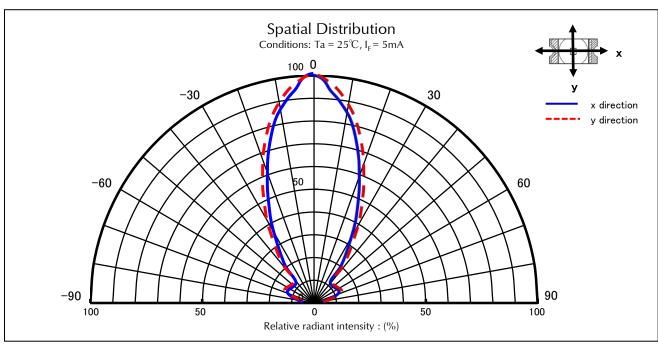




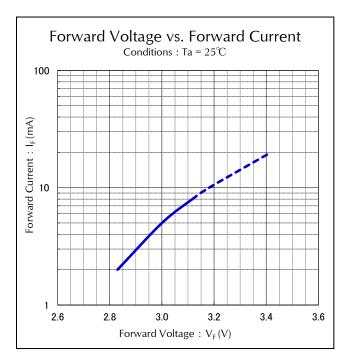





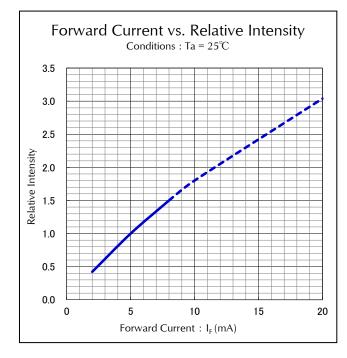


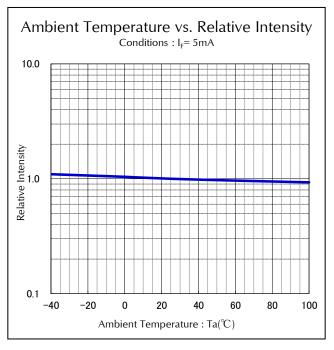




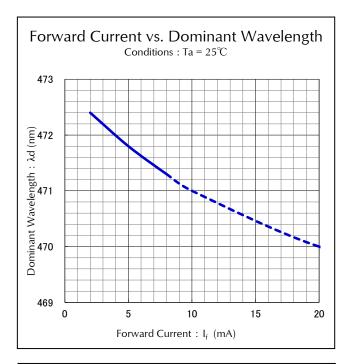

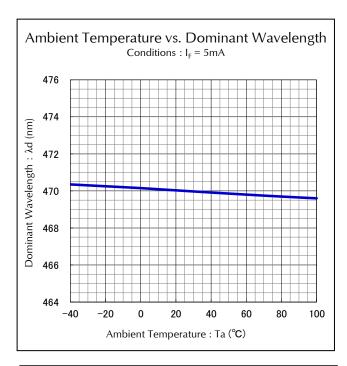






### **Soldering Precaution**

(acc.to EIAJ-4701/300)

- Heat stress during soldering will influence the reliability of LEDs, however that effect will vary on heating method. Also, if components of varying shape are soldered together, it is recommended to set the soldering pad temperature according to the component most vulnerable to heat (e.g., surface mount LED).
- LED parts including the resin are not stable immediately after soldering ( when they are not at room temperature), any mechanical stress may cause damage to the product. Please avoid such stress after soldering, especially stacking of the boards which may cause the boards to warp and any other types of friction with hard materials.
- Recommended temperature profile for the Reflow soldering is listed as the temperature of the resin surface. Temperature distribution varies on heating method, PCB material, other components in the assembly, and mounting density.

Please do not repeat the heating process in Reflow process more than twice.

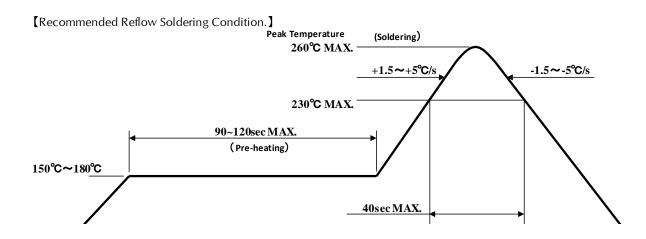

Note 1 Recommended temperature profile for the reflow soldering is listed as the temperature of the resin surface. This should be the maximum temperature for soldering. Lowering the heating temperature and decreasing heating time is very effective in achieving higher reliability.

Note 2 The reflow soldering process should be done up to twice(2 times Max). When second process is performed, interval between first and second process should be as short as possible to prevent absorption of moisture to resin of LED. The second soldering process should not be done until LEDs have returned to room temperature (by nature-cooling) after first soldering process.

## Soldering condition

### VCDB1104P-4B83B-TR

- 4. If soldering manually, Stanley recommends using a soldering iron equipped with temperature control. During the actual soldering process, make sure that the soldering iron never touches the LED itself, and avoid the LED's electrode heating temperature reaching above the heating temperature of the solder pad. All repairs must be performed only once in the same spot, and please avoid reusing components.
- 5. In soldering process, immediately after iron tip is cleaned, please make sure that the soldering iron reaches the appropriate temperature, before using. Also, please avoid applying any types of pressure to the soldered components before the solder has been cooled and hardened, as it may deteriorate solder performance and solder quality.

#### [Recommended Manual Soldering Condition]

Temperature of Iron Tip	350℃MAX.
Soldering Duration, Time	3sec.Max.,1 time

- 6. When using adhesive material for tentative fixatives, thermosetting resin or Ultraviolet radiation (UV) setting resin with heat shall be recommended. «The curing condition, Temperature:150°CMax./Time:120sec.Max.»
- 6. Flow soldering (dip soldering) is not recommended for this product.
- 7. Isopropyl alcohol is recommended for cleaning. Some chemicals, including Freon substitute detergent could corrode the lens or the casing surface, which cause discoloration, cloud, crack and so on. Please review the reference chart below for cleaning. Cleaning with ultrasonic shall not be recommended.

Chemical	Adaptability
Ethyl Alcohol	0
Isopropyl Alcohol	0
Pure Water	0
Trichloroethylene	×
Chlorothene	×
Acetone	×
Thinner	×

## Handling Precaution

#### VCDB1104P-4B83B-TR

#### 【For Electric Static Discharge (ESD)】

This kind of LED lamp is highly sensitive to surge voltage generated by the On/Off status change and discharges of static electricity through frictions with synthetic materials, which may cause severe damage to the die or undermine its reliability.

Damaged products may experience conditions such as extremely high reverse voltage, or a decrease of forward rise voltage, deteriorating its optical characteristic.

Stanley products are designed to withstand up to 1,000V under the EIAJ ED-4701/300 Test #304 (HBM), and are packed with anti-static components. However, the following precautions and measures are vital in ensuring product quality during shipment.

EIAJ ED-4701/300 (304/HBM) Electrification model: C=100pF, R2=1.5K $\Omega$ 

#### 1. Electrification/Static Electricity protection

Stanley recommends the following precautions in order to avoid product (die) damage from static electricity, when an operator and other materials electrified by friction coming in contact with the product.

- ① Do not place electrified non-conductive materials near the LED product.

  Avoid LED products from coming into contact with metallic materials.( Should the metallic material be electrified, the sudden surge voltage will most likely damage the product.)
- ② Avoid a working process which may cause the LED product to rub against other materials.
- ③ Install ground wires for any equipment, where they can be installed, with measures to avoid static electricity surges.
- **4** Prepare a ESD protective area by placing a Conductive Mattress (1M $\Omega$  MAX.) and Ionizer to remove any static electricity.
- ⑤ Operators should wear a protective wrist-strap.
- 6 Operators should wear conductive work-clothes and shoes.
- To handle the products directly, Stanley recommends the use of ceramic, and not metallic, tweezers.

#### 2. Working Environment

- ① A dry environment is more likely to cause static electricity. Although a dry environment is ideal for storage state of LED products, Stanley recommends an environment with approximately 50% humidity after the soldering process.
- (2) Recommended static electricity level in the working environment is 150V, which is the same value as Integrated Circuits (which are sensitive to static electricity).

## Handling Precaution

### VCDB1104P-4B83B-TR

#### **[Other Precautions]**

- 1. Stanley LED Lamps have semiconductor characteristics and are designed to ensure high reliability. However, the performance may vary depending on usage conditions.
- 2. Absolute Maximum Ratings are set to prevent LED lamps from failing due to excess stress( temperature, current, voltage, etc.). Usage conditions must not exceed the ratings for a moment, nor do reach one item of absolute maximum ratings simultaneously.
- 3. In order to ensure high reliability from LED Lamps, variable factors that arise in actual usage conditions should be taken it to account for designing. ( Derating of TYP., MAX Forward Voltage, etc.)
- 4. Please insert Straight Protective Resistors into the circuit in order to stabilize LED operation and to prevent the device from igniting due to excess current.
- 5. Please check the actual performance in the assembly because the Specification Sheets are described for LED device only.
- 6. Please refrain from looking directly at the light source of LED at high output, as it may harm your vision.
- 7. The products are designed to operate without failure in recommended usage conditions. However, please take the necessary precautions to prevent fire, injury, and other damages should any malfunction or failure arise.
- 8. The products are manufactured to be used for ordinary electronic equipment. Please contact our sales staff beforehand when exceptional quality and reliability are required, and the failure or malfunction of the products might directly jeopardize life or health ( such as for airplanes, aerospace, transport equipment, medical applications, nuclear reactor control systems and so on).
- 9. The formal specification sheets shall be valid only by exchange of documents signed by both parties.

## **Packaging Specifications**

### VCDB1104P-4B83B-TR

This product is baked (moisture removal) before packaging, and is shipped in moisture-proof packaging (as shown below) to minimize moisture absorption during transportation and storage. However, with regard to storing the products, Stanley recommends the use of dry-box under the following conditions is recommended. Moisture-proof bag as the packaging is made of anti-static material but packaging box is not.

#### [Recommended Storage Condition / Products Warranty Period ]

Temperature	+5 <b>~</b> 30℃	
Humidity	Under 70%	

In the case of the package unopened, 6 months under [Recommended Storage Condition]. Please avoid rapid transition from low temp. condition to high temp. condition and storage in corroding and dusty environment.

#### [Time elapsed after Package Opening]

The package should not be opened until immediately prior to its use, and please keep the time frame between package opening and soldering which is **[maximum 168h]**.

If the device needs to be soldered twice, both soldering operations must be completed within the 168h.

If any components should remain unused, please reseal the package and store them under the conditions described in the [ Recommended Storage Condition ] above.


This product must be required to perform baking process (moisture removal) for at 48( MIN.).~72h (MAX.), at 60 +/- 5 degrees Celsius if following conditions apply.

- 1. In the case of silica gel (blue) which indicates the moisture level within the package, changes or loses its blue color.
- 2. In the case of time passes for 168h after the package is opened once.

Baking process should be performed after LED having been taken out of the package.


Baking may be performed in the tape-reel form , however if it is performed with the reel stacked over one another, it may cause deformation of the reels and taping materials and later obstruct mounting. Please handle only once it has returned to room temperature. Provided that, baking process shall be 2 times MAX.



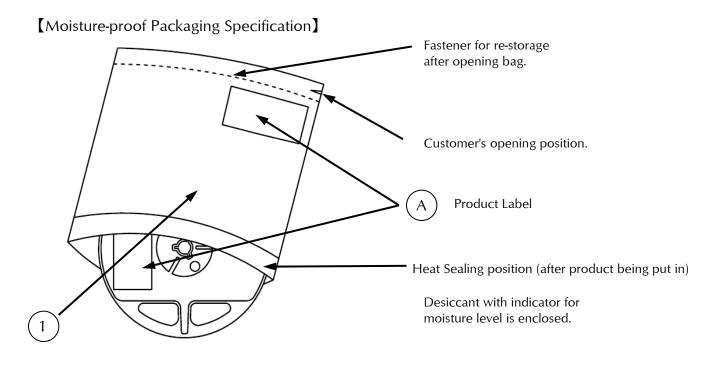

SYM.	PART NAME	MATELRIAL	REMARKS
1	Moisture-proof bag with Aluminum layer	PET+Al+PE	with ESD protection

## [Flow Chart-package Opening to Mounting]

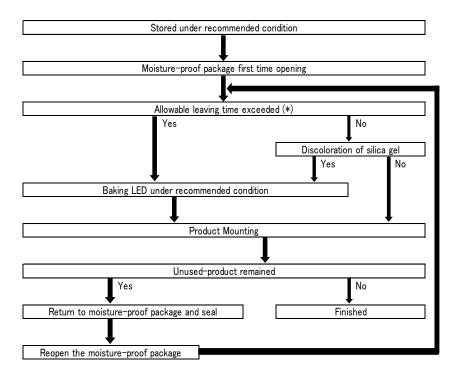

Allowable leaving time means the maximum allowable leaving time after opening package, which depends on each LED type.

The allowable leaving time should be calculated form the first opening of package to the time when soldering process is finished.

When judging if the allowable leaving time has exceeded or not, please subtract the soldering time. The allowable leaving time after reopening should be calculated form the first opening of package, or from the time when baking process is finished.


## [Packing box]

( RoHS•ELV Compliant )

Box TYPE	Outline dimension L × W × H (mm)	Capacity of the box
Type A	280 × 265 × 45	3 reels
Type B	310 × 235 × 265	15 reels
Type C	440 × 310 × 265	30 reels

The above measure is all the reference value.

The box is selected out of the above table by shipping quantity.

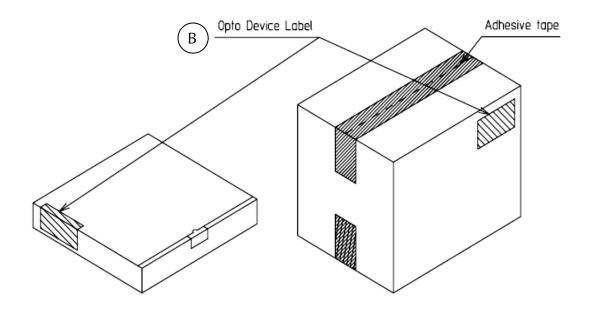

Type A

Material / box : Cardboard C5BF

Type B,C

Material / box : Cardboard K5AF


Partition : Cardboard K5BF



## [Label Specification]


(acc.to JIS-X0503(Code-39))





- A. Parts number
- B. Bar-code for parts number
- C. Parts code (In-house identification code for each parts number)
- D. Packed parts quantity
- E. Bar-Code for packed parts quantity
- F. Lot number & Rank (16 digits)
- G. Bar-Code for Lot number & Rank

## (B) Opto device label

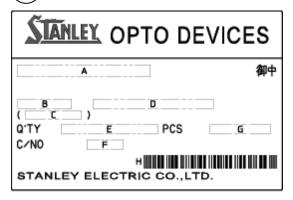


- A. Customer Name
- B. Parts Type
- C. Parts Code
- D. Parts Number
- E. Packed Parts Quantity
- F. Carton Number
- G. Shipping Date
- H. Bar-Code for In-house identification Number

<Remark> Bar-code font : acc.to Code-39(JIX0503)



(acc.to JIS-C0806-03)

### [Appearance]

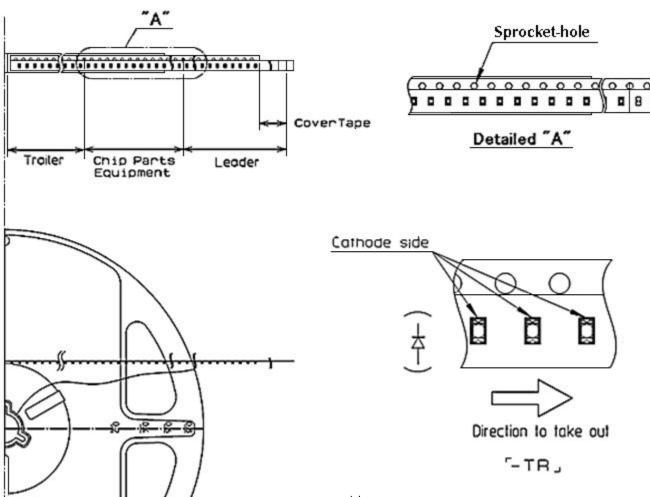

#### Note

"-TR" means cathode side of LEDs should be placed on the sprocket-hole side.

Items		Specifications	Remarks	
Cover-tape Leader area		Cover-tape shall be longer than 320mm without carrier-tape	The end of cover-tape shall be held with adhesive tape.	
	Carrier-tape	Empty pocket shall be more than 25 pieces.	Please refer to the above figure for Taping & reel orientation .	
Trailer area		Empty pocket shall be more than 40 pieces.	The end of taping shall be inserted into a slit of the hub.	

## Taping and Reel Specifications

#### VCDB1104P-4B83B-TR

(acc.to JIS-C0806-03)

### 【 Qty. per Reel】

3,000parts/reel

Minimum Qty. per reel might be 500 parts when getting less than 3,000 parts. In such case, parts of 500-unit-qty. shall be packed in a reel and the qty. shall be identified on the label.

#### [ Mechanical strength]

Cover-tape adhesive strength shall be  $0.1 \sim 1.0 \text{N}$  (An angle between carrier-tape and cover-tape shall be 170 deg.). Both tapes shall be so sealed that the contained parts will not come out from the tape when it is bent at a radius of 15mm.

#### **Others**

Reversed-orientation, Up-side down placing, side placing and out of spec. parts mix shall not be held. Max qty. of empty pocket per reel shall be defined as follows.


Qty./reel	Max. qty. of empty pocket	Remark
500	1	-
1,000	1	-
1,500	1	-
2,000	2	No continuance
2,500	2	No continuance
3,000	3	No continuance




(acc.to JIS-C0806-03)

Unit: mm


## **[Taping Dimensions]**

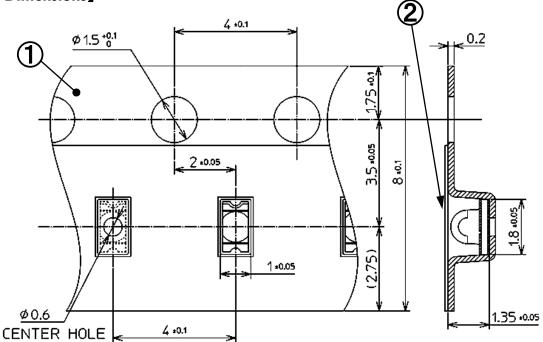



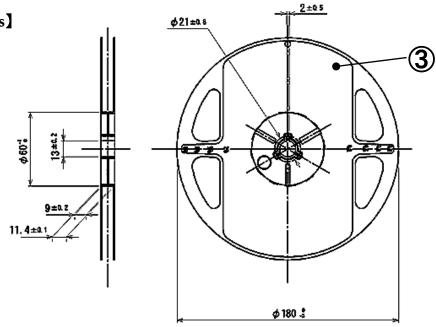

SYM.	PART NAME	REMARKS
1	Carrier-tape	Conductive Grade
2	Cover-tape	Anti-Static Grade
3	Carrier-real	Anti-Static Grade



① - 1digit: Production Location (Mark identify alphabet)

② - 1digit: Production Year (Last digit of Production Year 2009→9,2010→0,2011→1,···)

③ - 2digits: Production Month (Jan. to Sep., should be 01,02,03,....)

4 - 2digits : Production Date

**5** - 3digits: Serial Number

6 - 2digits: Tape and Reel following Number

7 - 2digits: Luminous Intensity Rank.

(If luminous intensity rank is 1 digit, "-" shall be dashed on the place for the second digit.

If there is no identified intensity rank, "--" is used to indicate.)

8 - 2digits: Chromaticity Rank

(If chromaticity rank is 1 digit, "-" shall be dashed on the place for the second digit.

If there is no identified intensity rank, "--" is used to indicate.)

9 - 1digit: Option Rank (Stanley normally print "-" to indicate)



## Correspondence to RoHS•ELV instruction

### VCDB1104P-4B83B-TR

This product is in compliance with RoHS•ELV.

Prohibition substance and it's criteria value of RoHS•ELV are as follows.

- •RoHS instruction ..... Refer to following  $(1) \sim (6)$ .
- •ELV instruction ....... Refer to following  $(1) \sim (4)$ .

	Substance Group Name	Criteria Value
(1)	Lead and its compounds	1,000ppm Max
(2)	Cadmium and its compounds	100ppm Max
(3)	Mercury and its compounds	1,000ppm Max
(4)	Hexavalent chromium	1,000ppm Max
(5)	PBB	1,000ppm Max
(6)	PBDE	1,000ppm Max



## Reliability Testing Result

## VCDB1104P-4B83B-TR

Reliability Testing Result	Applicable Standard	Testing Conditions	Duration	Failure
Room Temp. Operating Life	EIAJ ED- 4701/100(101)	Ta = 25°C, I <sub>F</sub> = Maxium Rated Current	1,000 h	0/25
Resistance to Soldering Heat	EIAJ ED- 4701/300(301)	Pre-heating: 150∼180°C 120s Max.  Operation Heating: 230°C 40s Max.  Peak Temperature: 260°C	Twice	0/25
Temperature Cycling	EIAJ ED- 4701/100(105)	Minimum Rated Storage Temperature(30min)  Normal Temperature(15min)  Maximum Rated Storage Temperature(30min)  Normal Temperature(15min)	5 cycles	0/25
Wet High Temp. Storage Life	EIAJ ED- 4701/100(103)	$Ta = 60 \pm 2^{\circ}C$ , RH = $90 \pm 5\%$	1,000 h	0/25
High Temp. Storage Life	EIAJ ED- 4701/200(201)	Ta = Maximum Rated Storage Temperature	1,000 h	0/25
Low Temp. Storage Life	EIAJ ED- 4701/200(202)	Ta = Minimum Rated Storage Temperature	1,000 h	0/25
Vibration, Variable Frequency	EIAJ ED- 4701/400(403)	98.1m/s <sup>2</sup> (10G), 100 ~ 2KHz sweep for 20min., XYZ each direction	2 h	0/10

## Failure Criteria

Items	Symbol	Conditions	Failure Criteria
Luminous Intensity	$I_{V}$	I <sub>F</sub> =5mA	Testing Min. Value < Standard Min. Value × 0.5
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =5mA	Testing Max. Value ≧ Standard Max. Value × 1.2
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	Testing Max. Value ≧ Standard Max. Value × 2.5
Appearance	-	-	Notable discoloration, deformation and cracking



# Special Notice to Customers Using the Products and Technical Information Shown in This Data Sheet

- 1) The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license.
- 2) For the purpose of product improvement, the specifications, characteristics and technical data described in the data sheets are subject to change without prior notice. Therefore it is recommended that the most updated specifications be used in your design.
- 3) When using the products described in the data sheets, please adhere to the maximum ratings for operating voltage, heat dissipation characteristics, and other precautions for use. We are not responsible for any damage which may occur if these specifications are exceeded.
- 4) The products that have been described to this catalog are manufactured so that they will be used for the electrical instrument of the benchmark (OA equipment, telecommunications equipment, AV machine, home appliance and measuring instrument).
  - The application of aircrafts, space borne application, transportation equipment, medical equipment and nuclear power control equipment, etc. needs a high reliability and safety, and the breakdown and the wrong operation might influence the life or the human body. Please consult us beforehand if you plan to use our product for the usages of aircrafts, space borne application, transportation equipment, medical equipment and nuclear power control equipment, etc. except OA equipment, telecommunications equipment, AV machine, home appliance and measuring instrument.
- 5) In order to export the products or technologies described in this data sheet which are under the "Foreign Exchange and Foreign Trade Control Law," it is necessary to first obtain an export permit from the Japanese government.
- 6) No part of this data sheet may be reprinted or reproduced without prior written permission from Stanley Electric Co., Ltd.
- 7) The most updated edition of this data sheet can be obtained from the address below: <a href="http://www.stanley-components.com/en">http://www.stanley-components.com/en</a>